



Model Number


BT65A

Activator for F31 series

Features

- Four fixed actuating lugs, offset by 90°
- For right and left rotating drives with 180° rotational motion

Dimensions

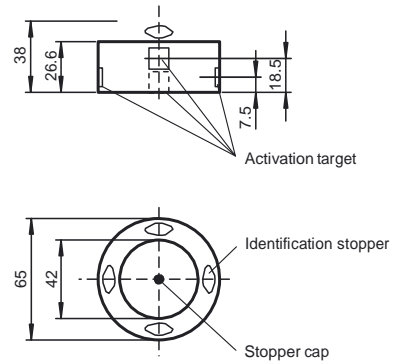

Technical data

General specifications

Ring diameter	≤ 65 mm
Spring ring height	≤ 6 mm

Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
---------------------	-------------------------------

Mechanical specifications

Shaft diameter	< 58 mm
Shaft height	20 mm and 30 mm
Fixing hole pattern	30 x 80 mm

Material

Housing	PA
Spacer disk	PA (1 unit, 10 mm strong)
Stopper cap	PBT (1 unit black)
Identification stopper	PP (2 units yellow, 2 units black)
Fixing screw	for activator: V2A (1 unit M6 x 25) for sensors - F31: V2A (4 items M5 x 16, 2 items M5 x 12)
Activation target	V2A (integrated)

Note

The activator consists of a conductive plastic material which prevents static charging and allows installation in potentially explosive environments.

Release date: 2007-09-13 14:18 Date of issue: 12/09/06/06/03/03.xml

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs, Printed in Germany