

MODEL NUMBER

TXP-E22GNMM


PRODUCT LINE

Switchbox TXP and TXS

SPECIFICATIONS

Enclosure	Tropicalized Aluminum
Bus/Sensor	(2) p+f NJ2+V3-N inductive NAMUR
Area Classification	Non-incendive
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) M20
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

WIRING DIAGRAM

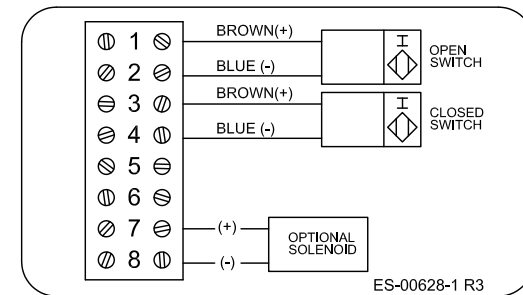

**TUBI
VALVES**

info@tubi-valves.com
+31 (0)229 220 005


Current as of May 20, 2020 – Subject to change without notice.

NAMEPLATE



CI I Div 2, Grps A-D; CI II Div 2, Grps F-G; -50°C ≤ Ta ≤ 60°C; Type 4
Ex nA IIC T4 Gc; -60°C ≤ Ta ≤ 56°C
Ex tc IIIC T75°C Dc; -50°C ≤ Ta ≤ 56°C; IP66/67
SWITCH: 3mA @ 8VDC NAMUR Output

Model #:
Serial #:



TOPWORX

3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com