

MODEL NUMBER

TXP-L22GNMM


PRODUCT LINE

Switchbox TXP and TXS


SPECIFICATIONS

Enclosure	Tropicalized Aluminum
Bus/Sensor	(2) GO Switches SPDT hermetically sealed
Area Classification	Non-incendive
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) M20
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

WIRING DIAGRAM

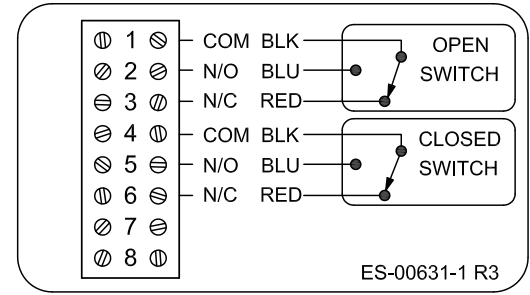


NAMEPLATE



CI I Div 2, Grps A-D; CI II Div 2, Grps F-G; $-50^{\circ}\text{C} \leq T_a \leq 60^{\circ}\text{C}$; Type 4
 Ex nC IIC T6 Gc; $-65^{\circ}\text{C} \leq T_a \leq 55^{\circ}\text{C}$
 Ex tc IIIC T75°C Dc; $-50^{\circ}\text{C} \leq T_a \leq 55^{\circ}\text{C}$; IP66/67
 SWITCH: SPDT 4A/120VAC; 3A/24VDC Hermetically Sealed

Model #:
Serial #:



TUBI VALVES

info@tubi-valves.com
+31 (0)229 220 005

Current as of February 25, 2020 – Subject to change without notice.

TOPWORX
3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com