

Y FILTER IN MESSING Fig. 21MS - PN 16


Zeeff in roestvaststaal 304, 0,4 mm t/m 1", 1.1/4" > 0,5 mm

AANSLUITING:

BSP binnendraad / NFE 03-004 (dec. 1981)

AFMETINGEN EN GEWICHTEN: (Afmetingen in mm.)

Diam.	L	H	Kg.
3/8"	55	40	0,18
1/2"	58	40	0,17
3/4"	70	50	0,27
1"	87	60	0,42
1 1/4"	96	68	0,69
1 1/2"	106	75	0,88
2"	126	90	1,35

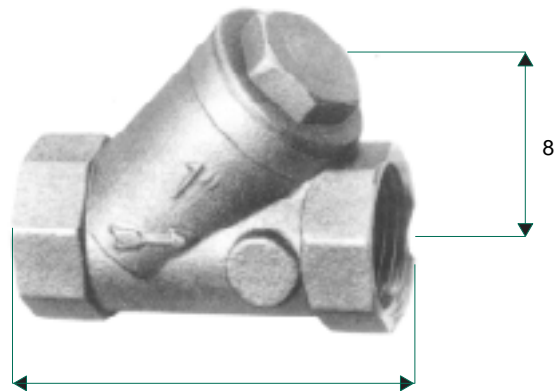

L

Y FILTER IN BRONS Fig. 21BR – PN20

Zeeff in roestvaststaal 304, 0,4 mm t/m 1", 1.1/4" > 0,5 mm

AANSLUITING:

BSP binnendraad / NFE 03-004 (dec. 1981)

AFMETINGEN EN GEWICHTEN: (Afmetingen in mm.)

Diam.	L	H	Kg.
3/8"	55	40	0,19
1/2"	58	44	0,24
3/4"	69	50	0,35
1"	87	60	0,48
1 1/4"	96	68	0,73
1 1/2"	106	75	0,94
2"	126	90	1,50
2 1/2"	145	100	2,35
3"	165	130	3,70
4"	219	170	6,65

