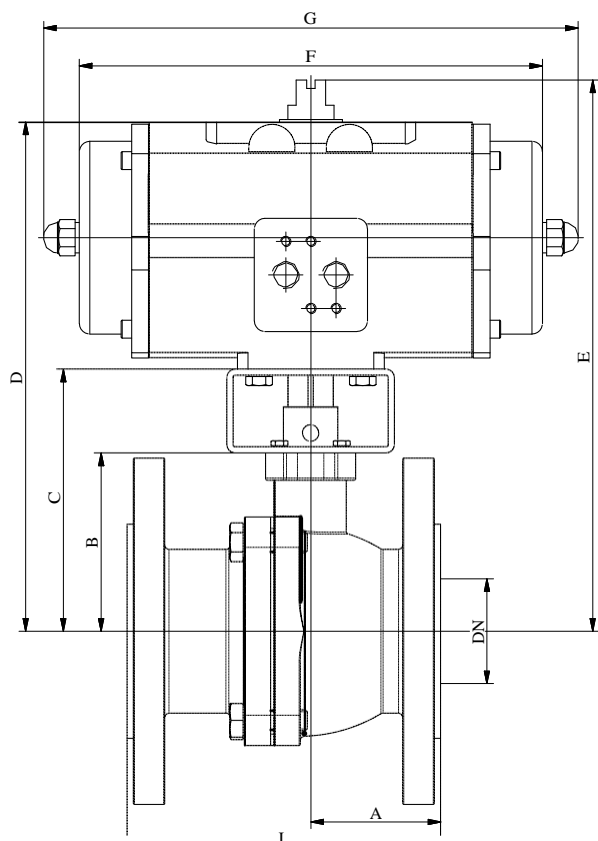


FIGUUR:

- PD:** Pneumatische bediening, dubbelwerkend
PE: Pneumatische bediening, enkelwerkend
PEO: Pneumatische bediening, enkelwerkend, normaal open


AFMETINGEN: (mm)

DN	L	A	B	PD					PE						
				PD	C	D	E	F	Kg	PE	C	D	E	F	Kg
15	115	49,0	48,5	0025	88,5	168,5	188,5	159	4,1	0025	88,5	168,5	188,5	172	4,5
20	120	55,5	53,0	0025	93,0	173,0	193,0	159	4,7	0025	93,0	173,0	193,0	172	5,1
25	125	51,5	59,5	0025	99,5	179,5	199,5	159	5,6	0040	99,5	192,5	212,5	204	6,7
32	130	53,0	72,0	0025	112,0	192,0	212,0	159	7,3	0040	112,0	205,0	225,0	204	8,4
40	140	61,0	77,0	0040	117,0	210,0	230,0	180	9,1	0100	117,0	235,0	255,0	267	11,9
50	150	62,0	85,0	0065	125,0	230,0	250,0	199	11,8	0100	125,0	243,0	263,0	267	14,0
65	170	81,5	98,0	0065	148,0	253,0	273,0	199	14,4	0200	158,0	301,0	321,0	360	21,2
80	180	79,0	108,5	0100	158,5	276,5	296,5	221	18,1	0200	168,5	311,5	331,5	360	24,2
100	190	94,0	134,0	0200	184,0	327,0	347,0	283	26,3	0350	194,0	375,0	395,0	387	37,7
125	325	120,5	165,0	0350	215,0	396,0	416,0	305	44,4	0600	225,0	445,0	475,0	477	61,8
150	350	155,0	190,0	0350	250,0	431,0	451,0	305	59,2	0600	250,0	470,0	500,0	477	76,4
200	400	190,0	229,0	0600	289,0	509,0	539,0	387	100,2	1600	319,0	616,0	646,0	637	146,4

De pneumatische bediening is berekend voor een stuurdruk van 6 bar, met een veiligheidsfactor van 30% en een maximale verschuldruk van 16 bar.

TOEBEHOREN:

Magneetventielen, eindeloopschakelaars, noodhandbediening, pneumatische of elektro-pneumatische klepstandsteller.