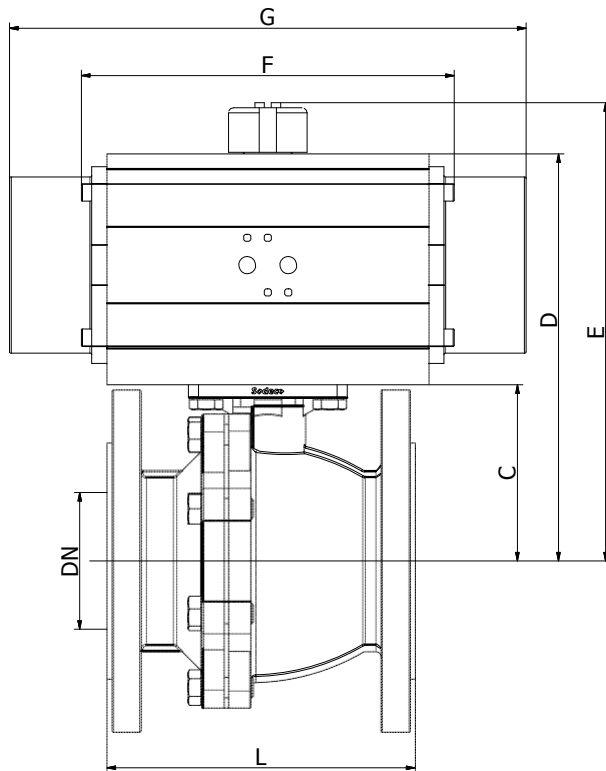


FIGUUR:

- AD:** pneumatische bediening, dubbelwerkend
AS: pneumatische bediening, enkelwerkend
ASO: pneumatische bediening, enkelwerkend, normaal open

DN 15 - DN 100: rechtstreekse opbouw
 DN 125 - DN 200: met koppel- en brugstuk


AFMETINGEN: (mm)

DN	L	C	AD	AD				AS	AS			
15	115	48,0	0010	94,0	124,0	100	2,7	0020	114,0	144,0	163	3,7
20	120	53,0	0010	99,0	129,0	100	3,5	0020	119,0	149,0	163	4,4
25	125	59,0	0020	125,0	155,0	145	5,1	0040	144,0	174,0	195	6,0
32	130	71,0	0020	137,0	167,0	145	6,7	0040	156,0	186,0	195	7,6
40	140	76,0	0040	161,0	191,0	158	9,1	0080	183,0	213,0	217	10,5
50	150	85,0	0040	170,0	200,0	158	11,8	0080	192,0	222,0	217	13,3
65	170	93,5	0080	200,5	230,5	177	16,5	0200	228,5	258,5	299	20,5
80	180	103,0	0130	220,0	250,0	196	21,3	0200	238,0	268,0	299	24,5
100	190	132,0	0200	267,0	297,0	225	31,2	0500	301,0	331,0	397	40,5
125	325	150,0	0500	399,0	429,0	304	59,0	0850	421,0	451,0	473	69,4
150	350	170,0	0500	419,0	449,0	304	80,2	0850	441,0	471,0	473	90,6
200	400	219,0	0850	490,0	520,0	372	129,9	1200	518,0	548,0	560	146,4

De pneumatische bediening is berekend voor een stuurdruk van 6 bar, met een veiligheidsfactor van 30% en een maximale verschilddruk van 16 bar.

TOEBEHOREN:

Klepstandsteller, eindeloopschakelaars, naderingsschakelaars, snelheidsregelplaat, ...