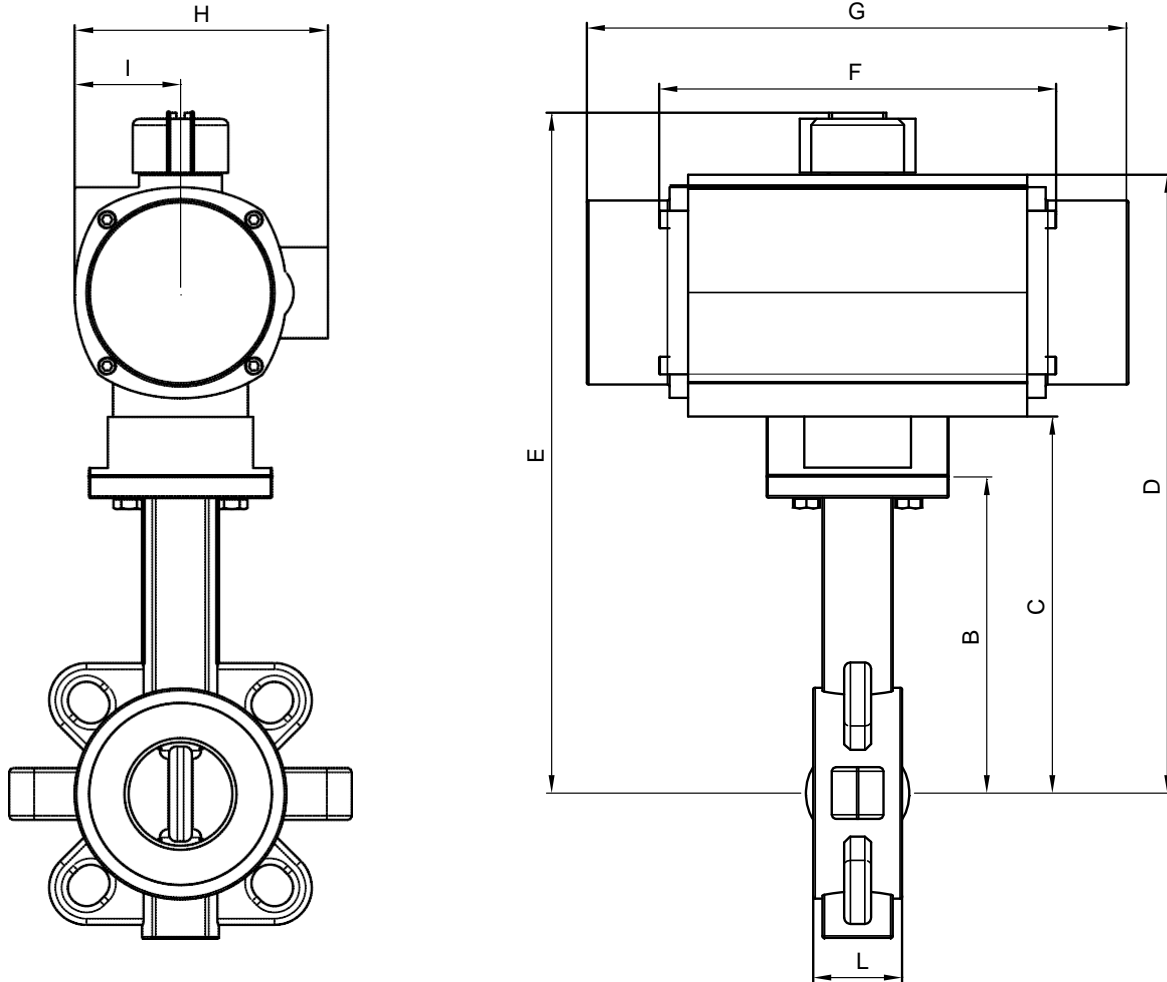


FIGUUR:

- AD:** Pneumatische bediening, dubbelwerkend
AS: Pneumatische bediening, enkelwerkend
ASO: Pneumatische bediening, enkelwerkend, normaal open


AFMETINGEN: (mm.)

DN	L	B	C	ADA					ASR/ASRO				
				ADA	D	E	F	Kg	ASR	D	E	G	Kg
40	33	140	168	40	253	283,0	158,0	4,6	80	275	305,0	218	6,2
50	43	156	184	80	291	321,0	177,0	7,0	130	301	331,0	258	8,8
65	46	161	189	80	296	326,0	177,0	7,5	130	306	336,0	258	9,3
80	46	167	195	130	312	342,0	196,0	8,8	200	330	360,0	299	12,3
100	52	184	212	200	347	377,0	225,0	12,1	300	364	394,0	349	17,3
125	56	207	235	300	387	417,0	273,0	18,0	500	404	434,0	397	24,9
150	56	215	239	300	391	421,0	273,0	19,0	500	408	438,0	397	25,9
200	60	257	281	500	450	480,0	304,0	28,7	850	472	502,0	473	39,7
250	68	248	272										
300	78	280	304										