

**TUBI VALVES**  
 info@tubi-valves.com  
 +31 (0)229 220 005

**MODEL NUMBER**

TXP-Q22GNMM


**PRODUCT LINE**

Switchbox TXP and TXS

**SPECIFICATIONS**

Enclosure	Tropicalized Aluminum
Bus/Sensor	(2) GO™ Switch SPDT hermetically sealed 1A
Area Classification	Non-incendive
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) M20
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

**WIRING DIAGRAM**

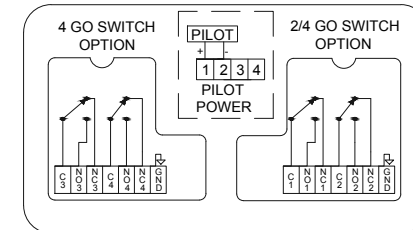


Current as of March 5, 2020 – Subject to change without notice.

**NAMEPLATE**



CI I Div 2, Grps A-D; CI II Div 2, Grps F-G; T4A -50°C ≤ Ta ≤ 60°C; T  
 Ex nA nC IIC T6 Gc; -55°C ≤ Ta ≤ 55°C  
 Ex tc IIIC T75°C Dc; -50°C ≤ Ta ≤ 55°C; IP66/67  
 SWITCH: 2A/120VAC; 1A/24VDC

Model #:  
 Serial #:



**TOPWORX**  
 3300 Fern Valley Road  
 Louisville, KY 40213

(502)969-8000 PH  
 (502)969-5911 FAX  
 www.topworx.com